


Sol-R-Skin™ BLUE

FIRE RESISTANT, THERMAL INSULATING & REFLECTIVE ROOF UNDERLAYMENT



MIAMI-DADE COUNTY
APPROVED

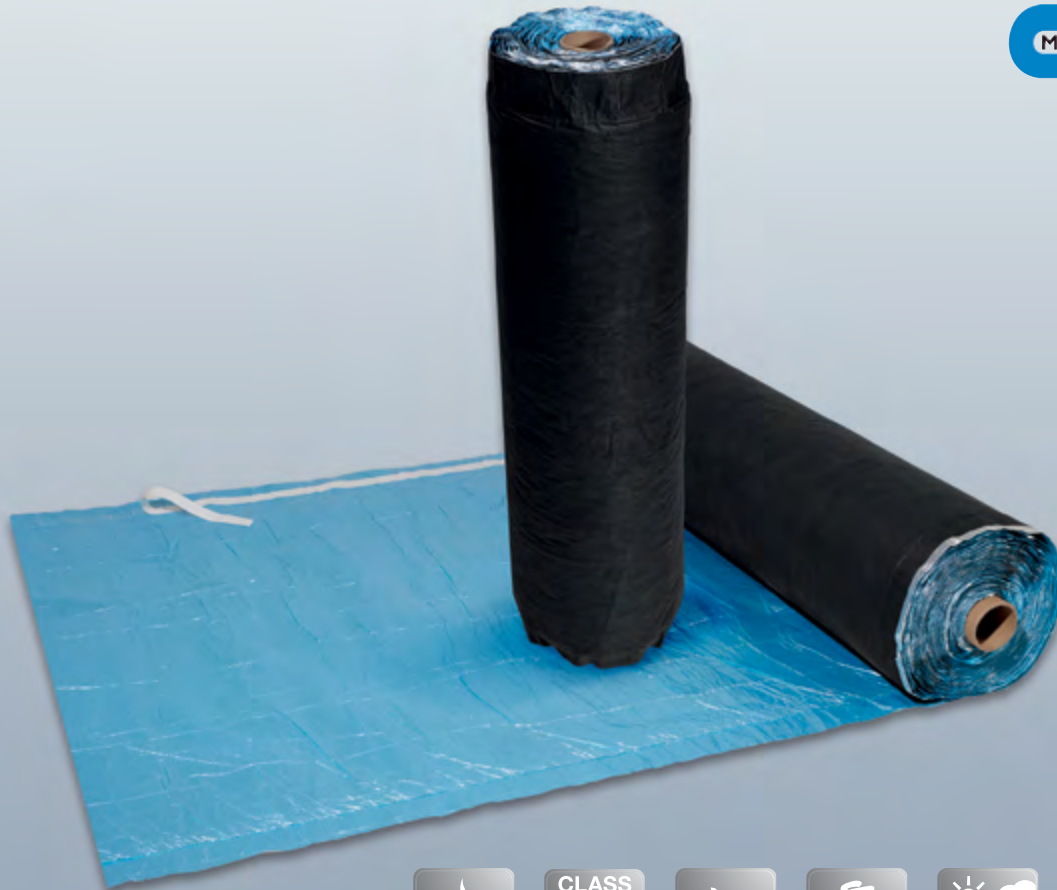

FIRE
RESISTANT



FIRE RATED



EASY
INSTALLATION



ENERGY
EFFICIENT



WEATHER
RESISTANT



HIGH
TEMPERATURE




YEAR LIMITED
WARRANTY

- Class A fire rated with stone coated steel and tile roof coverings
- Heat reducing radiant barrier over an insulating fiberglass blanket
- R 2.2 to 6.6 insulation for a variety of roof systems
- Cool blue surface helps to reduce sun glare during installation
- Use in any climate at any temperature
- 30 year limited warranty

Sol-R-Skin™ BLUE

UNMATCHED THERMAL PERFORMANCE

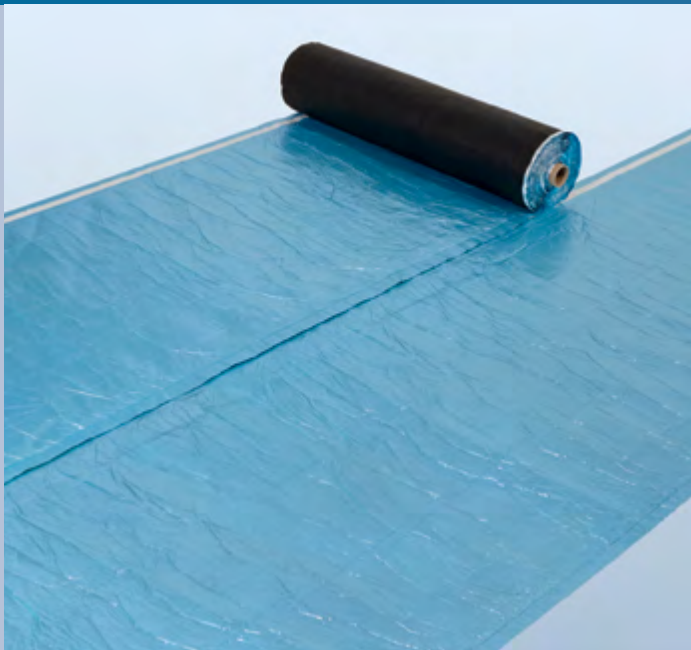

HIGH PERFORMANCE FOR ANY ROOF IN ANY CLIMATE



Class A Fire Resistant

The highest rating of fire resistance when installed with stone coated steel, concrete tile and clay tile roofing. Sol-R-Skin™ BLUE passes ASTM E-108 Class A fire testing with stone coated steel and tile roof coverings. The reflective aluminum foil and insulating fiberglass provide excellent heat resistance.



Easy Installation

Save time installing this lightweight roll with 450 square feet per roll weighing only 45 lbs per roll. It is quickly nailed into place and a simple adhesive strip at the headlap helps prevent wind uplift. The blue coating helps reduce glare, making it easier to install than other radiant barrier underlayments.



Durable Protection

The durable aluminum surface helps prevent leaks at fasteners and won't degrade over time.



Product Performance

Sol-R-Skin™ BLUE is backed by a manufacturer's limited 30 year warranty. Sol-R-Skin™ BLUE meets or exceeds all national, Florida & Miami-Dade building code requirements and outperforms all other underlayments.


DID YOU KNOW...



Sol-R-Skin™ BLUE roof underlayment is listed with California's Office of the State Fire Marshal to be used in fire resistant roof systems in the Wildland Urban Interface (WUI) regions.



Sol-R-Skin™ BLUE qualifies as an alternative to Cool Roofing requirements in California when re-roofing, according to California's Title 24 Part 6 Energy Code allowing above roof deck insulation with R-2 or better.

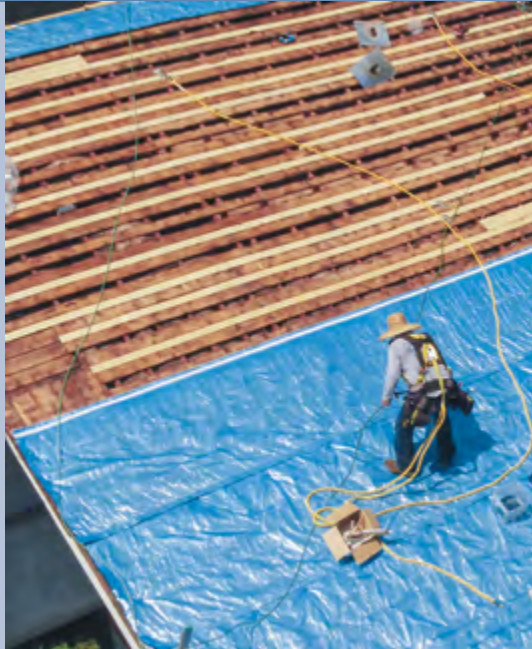

Energy Efficient

Sol-R-Skin™ BLUE provides insulation values ranging from 2.2 to 6.6 for various roof systems by combining two of the most energy efficient construction materials - radiant barrier and fiberglass insulation. The aluminum radiant barrier surface reflects heat with an impressive emissivity rating of 0.03. The fiberglass insulation beneath the aluminum provides a second layer of heat resistance. Roof systems installed with Sol-R-Skin™ BLUE can provide high R value ratings:

Stone Coated Steel Roofs:

- R 2.2 with panels fastened Direct-to-Deck
- R 5.5 with panels fastened to 2"x2" Battens
- R 6.6 with panels fastened to 2"x2" Elevated Battens

Concrete and Clay Tile Roofs:

- R 2.2 with tiles fastened Direct-to-Deck or on Battens
- R 5.7 with tiles fastened to Elevated Battens

“This product installs nicely and makes an easy single product solution to meet Class A for my steel roofs with the added benefit of energy savings for my customers.”

John Popa, Western Roofing Systems, Anaheim, CA

“Installing a single layer of Sol-R-Skin BLUE to achieve Class A with steel roofs is a value added alternative to the conventional requirement of installing underlayment and separate fire barrier. It also makes a great energy efficiency upgrade.”

Mike Lunneborg, Western Roofing Systems, Campbell, CA

“My team of roofers stated that it was an excellent underlayment to use with the new concrete tile. With rising energy costs, it is nice to know that there is a dependable and efficient underlayment system available for consumers. Thank you again for the wonderful product.”

Richard Collins JR, Rainy Day Roofing, Rancho Cucamonga, CA

CERTIFICATIONS / APPROVALS

Miami-Dade County Approved
Florida Building Code FL27940
Cal Fire BML 4310-2283:0500
CA BHGS T 1512
ASTM D8257, D226 Type II, E108 Class A
with Stone Coated Steel & Tile Roofing
Patents US 2017/0210089 A1
US 2016/0016386 A1

SPECIFICATIONS

Roll size 54" x 100' (450 sq.ft.)
Roll weight 45 lbs (nominal)
Thickness 3/8" (nominal)
Rolls per pallet 24 rolls
Pallet weight 1,250 lbs (nominal)

PART NUMBERS

92710 Roll - Pick up at Plant
92711 Drop Ship - 576 Rolls/Truck

About Westlake Royal Building Products™ | Roofing Solutions

The Roofing Solutions portfolio from Westlake Royal Building Products™ is a recognized, national leader in durable and sustainable clay, composite, concrete, and steel roof systems. Encompassing a suite of materials that provide strength, versatility, and refinement, our portfolio includes US Tile® Clay Roofing Products, Newpoint™ Concrete Roof Tile, Unified Steel™ Stone Coated Roofing, DaVinci® Roofscapes, and Westlake Royal™ Roofing Components, all designed to deliver a higher standard of roof installation, performance, and design.

SIDING & ACCESSORIES TRIM & MOULDINGS ROOFING STONE WINDOWS OUTDOOR LIVING



BE BOUNDLESS™

THE PRODUCTS TO DO EVERYTHING. THE POWER TO DO EVEN MORE.

There are no limits to how far we innovate, how deeply we express, how strongly we commit, how boldly we go.

Westlake
Royal Building Products™

© 2024 Westlake Royal Building Products

Westlake Royal™ Roofing Components
WestlakeRoyalRoofing.com
800.669.8453 - West & Central
863.824.1289 - Florida & East
Part# AC689 02/24 | 187700

