



Faux Mission Clay Tiles

INSTALLATION GUIDE




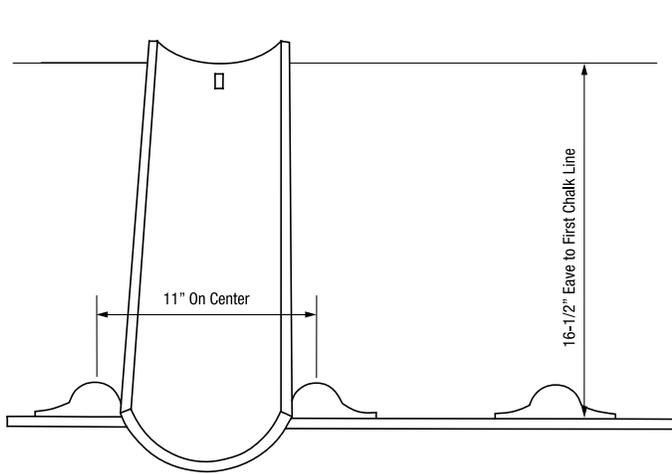


1. Chalk the first horizontal pan line at 16 1/2" from the eave.
2. Mark the on center spacing for pans at a maximum 11" along eave line. Install the birdstops along eave line between on center spacing for pans.

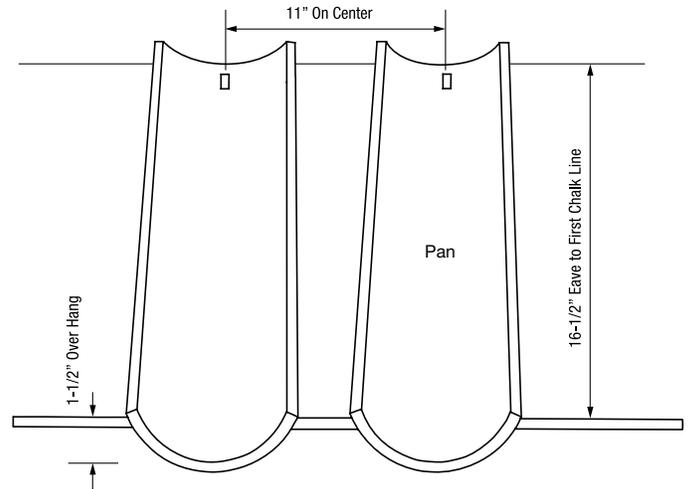


3. Install pans along eave line between birdstops by aligning the top edge of the pans with the horizontal chalk line marked at 16 1/2" for the eave.
4. Do not exceed the 11" maximum on-center spacing.

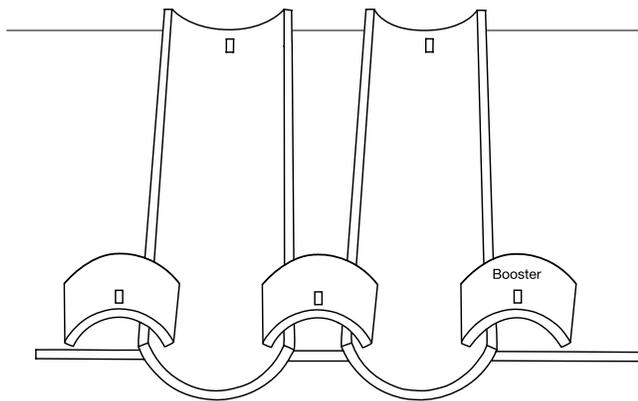

5. Cut off 3" booster piece along the factory "score" line from each booster/starter tile.
6. Rotate or reverse small booster tile so that factory fired edge (or small tapered end) is visible along the eave line.
7. Align booster tile with the lower exposed edge of the pan. Fasten each small booster tile by means of a tile nail with a butt hook, wire tie, or code approved adhesive method.

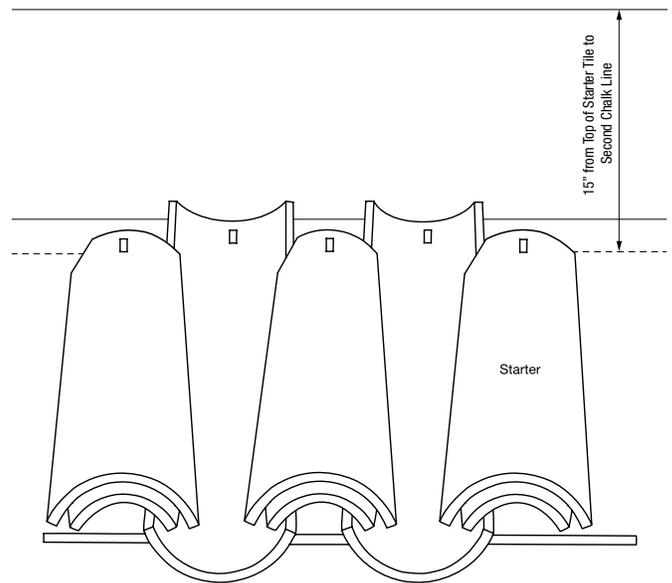

8. Make a diagonal cut at upper left corner of the starter/cover tile to match the diagonal cut of the 1-Piece "S" Tile or Claylite® field tile being used for the second course.
9. Install the 15" starter/cover tile directly over the small booster tiles along the eave line.
10. Chalk additional course line at maximum 15" course spacing from top of starter tiles.

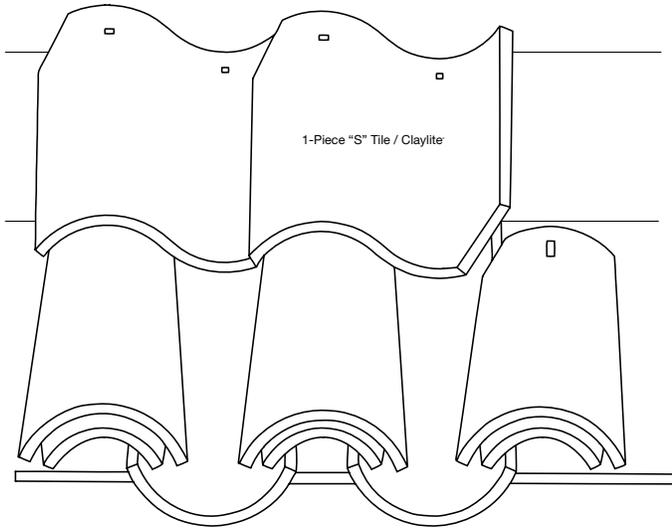

11. Install the 1-Piece "S" Tile or Claylite® tile directly over the top edge of the 2-Piece Mission eave treatment. Ensure that a minimum 3" headlap is maintained.
12. Proceed with the remainder of the roof installation using the 1-Piece "S" or Claylite® field tiles.





WARRANTY

U.S. Tile® clay roof tiles come with a Transferable Limited Clay Product Warranty that includes color fade limited coverage. Please see our website at WestlakeRoyalRoofing.com for details.

COLOR

Colors depicted may vary from actual colors due to the inherent variations in natural clay products and the limitations of the lithographic printing process (or variations in equipment and monitor settings).

The concerned parties should examine actual color samples at both the time of initial color selection and once again from the delivered production run prior to roof loading and installation.

In order to avoid unattractive color patterning during the installation of blended colors, the skilled installer should periodically view the roof from ground level at the distance of about 50 feet and make any necessary corrections. This will help ensure that any “hot spots,” checkerboarding, streaks, or stairstepping in the finished roofscape will be avoided. Proper blending can only be achieved as the product is loaded and installed to prevent undesired color patterning.

Sales Offices

Phoenix, ARIZONA
Corona, CALIFORNIA
Lathrop, CALIFORNIA
Stockton, CALIFORNIA
Rialto, CALIFORNIA
Denver, COLORADO
Pompano Beach, FLORIDA

Lake Wales, FLORIDA
Okeechobee, FLORIDA
Henderson, NEVADA
Fort Worth, TEXAS
Katy, TEXAS

Corporate Office

Westlake Royal Building Products
2801 Post Oak, Suite 600
Houston, Texas 77056

Western Office

Westlake Royal Roofing Solutions
7575 Irvine Center Drive, Suite 100
Irvine, CA 92618

Customer Service

800.669.TILE (8453)

Website



WestlakeRoyalRoofing.com



© 2022 WRRS LLC BR066 - 8/22

Westlake
Royal Roofing Solutions™